


## Fuel-Gard® VF-21SB/22SB Filter Water Separator



The Facet VF-21SB/22SB, when configured as a filter water separator, is an economical, compact housing designed to remove water and solids from aviation fuels. Both interior and exterior surfaces of the carbon steel body are epoxy coated to protect against corrosion. This sturdy, single cartridge housing is easy to maintain and requires only 2" (51 mm) base clearance for cartridge change out.



#### Standard Housing Design

- Carbon steel body
- Aluminum head
- · Epoxy coated internally and externally
- 150 psi (10.3 bar) design pressure
- · Swing bolt quick open closure
- · Buna-N o-ring closure gasket
- Vent and drain connections w/ brass petcocks provided
- 11/2" NPT inlet and outlet connections

#### **VESSEL OPTIONS**

MODEL	DESCRIPTION					
VF-21SB	Housing only					
VF-21SB-PG	Housing w/ Direct Reading Differential Pressur Gauge					
VF-21SB-PGS	Housing w/ Direct Reading Differential Pressure Gauge & Sight Glass					
VF-21SB-PGWP	Housing w/ Direct Reading Differential Pressure Gauge & ¾" NPT Coupling for Water Probe					
VF-21SB-S	Housing w/ Sight Glass					
VF-21SB-WP	Housing w/ ¾" NPT Coupling for Water Probe					
VF-22SB	Housing only					
VF-22SB-PG	Housing w/ Direct Reading Differential Pressure Gauge					
VF-22SB-PGS	Housing w/ Direct Reading Differential Pressure Gauge & Sight Glass					
VF-22SB-PGWP	Housing w/ Direct Reading Differential Pressure Gauge & ¾" NPT Coupling for Water Probe					
VF-22SB-S	Housing w/ Sight Glass					
VF-22SB-WP	Housing w/ ¾" NPT Coupling for Water Probe					
644160	Mounting Bracket					
644964	Grounding Cable					

Differential Pressure Gauge-The piston-type differential pressure gauge provides a simple visual warning. When 15 psi (1.03 bar) differential pressure is reached, the gauge indicator moves from green to red zone. This warning will prevent premature cartridge change-out.


Water Sight Glass- The water sight glass provides an easy means to detect water in the sump. The weighted ball, visible in the sight glass, will float only when water is present. The floating ball is an indication water should be drained from the housing to prevent both cartridge contamination and water traveling downstream from the housing.



Mounting Bracket (Optional)

ACCORDING TO THE REQUIREMENTS OF EUROPEAN PRESSURE EQUIPMENT DIRECTIVE (PED) 2014/68/EU ART. 4.3, WITHIN THE OPERATING LIMITS PROVIDED ON VESSEL NAMEPLATE AND SUMMARIZED BELOW, THESE FILTERS ARE DESIGNED AND MANUFACTURED IN ACCORDANCE WITH THE SOUND ENGINEERING PRACTICE AND EXEMPT FROM CE MARKING AND CERTIFICATION: 10 BAR(G) @ 35°C FOR AV-GAS AND JET FUEL.

# Fuel-Gard® VF-21SB/22SB Filter Water Separator

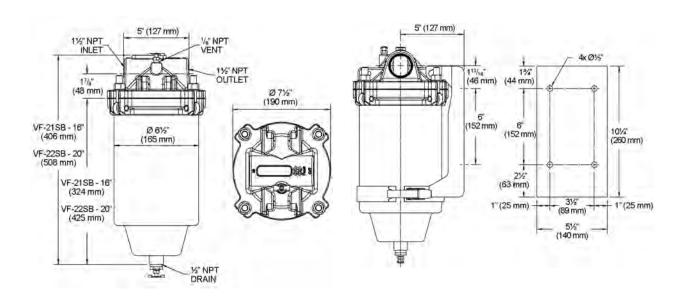

#### **Optional Bonding Kit**

The purpose of this bonding kit is to lessen the potential for static charge build up in the metal body of these vessels. This kit will allow the bowl, previously isolated because of the epoxy powder coating, to be bonded to system piping. One end of the bonding wire consists of a clamp that tightens onto the 1-1/2" piping. The other end has a heavy duty spring clamp that can be attached to the drain line valve. Remember if placing either end on a painted surface to scratch down to bare metal to allow contact.

This kit, part # 644964 can be purchased separately for existing vessels.









### **Optional Gammon Differential Pressure Indicator**

In 1966, Gammon Technical Products introduced the Gammon Gauge, which quickly became the world's #1 aviation fuel filter differential pressure gauge.

This device has been designed to easily be installed in our VF-21SB/22SB vessels.

- Aluminum and stainless steel construction
- 0-30 psi design range
- 150 psi operating pressure
- Built-in, cleanable filter
- Ultraviolet protected
- Viton GLT seals good -40° to +130°F
- Available in psi, bar, kPa, and kg/cm² scales
- Accurate ±0.75 psi at any pressure

MODEL	DESCRIPTION					
VF-21SB-PG2	Housing w/ Gammon Differential Pressure Indicator					
VF-22SB-PG2	Housing w/ Gammon Differential Pressure Indicator					
GTP-9782	Gammon Adapter					
GTP-9739	Gammon Installation Kit					



GTP-9782 Gammon Adapter



GTP-9739 Gammon Installation Kit





### VF21SB/22SB Series Coalescer Separator Cartridges



Facet VF-21SB/22SB Series coalescer separator cartridges provide long service life and high solids holding capacity with no unloading characteristics. These filter separator cartridges effectively remove water and solids from fuels.

#### **Standard Design Features**

- Recommended maximum operating temperature: 240 °F (115 °C)
- Maximum differential pressure: 75 psi (5.17 bar)
- Fluid pH range: 5 to 9Flow Direction: Outside to In

#### **Materials**

- Carbon steel structural components
- All metal components coated to protect against corrosion
- Standard gaskets are Buna-N—other materials available upon request

MODEL NUMBER	ELEMENTS	KEROSENE		AVIATION FUEL(1)		GASOLINE		DIESEL	
		gpm	lpm	gpm	lpm	gpm	lpm	gpm	lpm
VF-21SB	CC-21-7	35	140	15	57	45	170	23	87
VF-22SB	CC-22-7	50	284	21.2	80	60	227	30	114

<sup>1)</sup> Tested to meet the effluent requirements of El 1581, 6th Edition, Category C & M, Type S-LW (Jet Fuel and AV-Gas).

<sup>\*</sup> For applications other than AV-Gas and Jet Fuel, please contact the nearest Facet office.

<sup>\*\*</sup>DP given for viscosity <2 cSt