



## Seamless or welded pipes?


You know that stainless steel pipes can be manufactured in both seamless or welded forms. But what are the benefits offered by each of the two production processes? Which aspects arise for the quality and design of the end products?

-  Corrosion resistant pipes
-  Clad pipes
-  Special pipes and components ready for installation
-  Prefabricated piping/spools
-  Vessels, tanks and columns
-  Assemblies



**BUTTING**



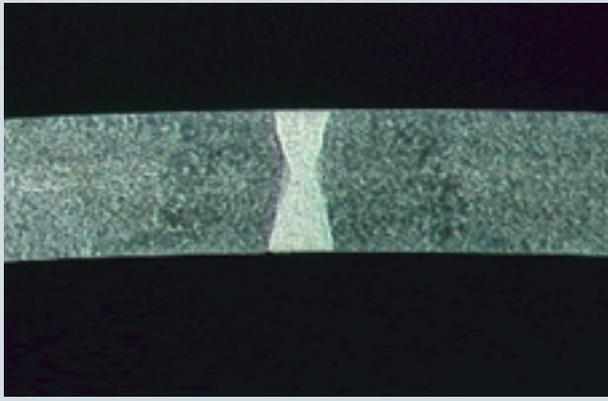

Pipe 88.9 x 3.05 mm in size: longitudinal weld is equal to the base material

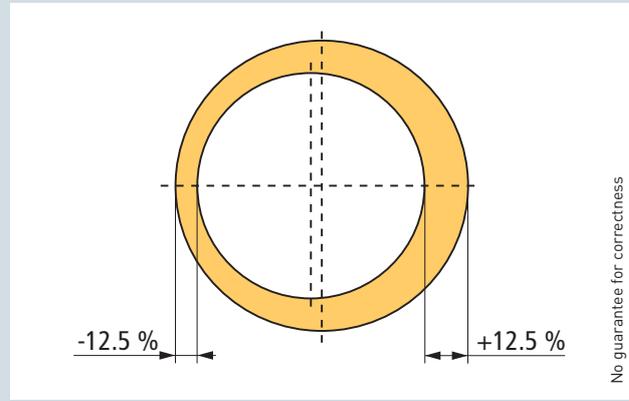


Diagram 2: The wall thickness tolerance is constant over the entire pipe body because of the evenness of the steel plate

No guarantee for correctness

## Decision criteria

The decision whether to use a seamless or welded pipe depends principally on the wall thickness / diameter ratio and the specified pipe tolerances.

### Availability

For the manufacture of seamless hot rolled pipes, a limited number of alloys is available. By contrast, there is generally no shortage of steel plates and coils used for the production of welded pipes in a number of different material grades. In addition, smaller quantities of raw materials can be recovered from service stores, and special alloys, such as Alloy C4, can be cut from wide material in stock.

### Tolerances

The wall thickness tolerance of 12.5 % for hot rolled seamless pipes is specified fundamentally in ASTM A999 or EN ISO 1127 T2. However, wall thickness differences caused by the manufacturing procedure may lead to a possible eccentricity, that is, to a deviation from symmetry (Diagram 2). Normally the tolerance for wall thicknesses of welded pipes is defined in ASTM A999 or EN ISO 1127 T3. The evenness of the steel plate or coil thickness ensures that the wall thickness tolerance remains constant across the entire pipe body and much better than the required  $\pm 10\%$ . This means there cannot be any eccentricity. Particularly for orbital welding or subsequent welding processes on building sites, a constant wall thickness and thus the exclusion of any eccentricities is a crucial criterion.

### Pipe Lengths and Quantities

When manufacturing seamless pipes, the length manufactured depends on the weight per metre or per rod. Thus up to NB 100, pipe lengths of a maximum 13 m, and up to NB 200 pipe lengths of a maximum of around 4 m can be produced. The minimum purchase quantity is determined by the size of the production batch of around 1 t. For welded pipes, the pipe lengths can be freely selected up to 12 m or 18 m without circumferential welds. The minimum production batch for pipes made from coil depends on the length of the coil for special alloys or sizes. With production from individual steel plates, small quantities may also be provided.

### Surfaces

The condition of the surfaces of seamless pipes is determined by the hot forming. Thus subsequent grinding, necessitated by the "orange skin" which occurs with this production process is only possible at a higher cost.

The manufacturing process for welded pipes allows the use of a wide variety of surface types in the raw material (e. g. cold rolled). In addition, a further enhancement of the surface condition can be achieved by supplementary processing of the pipe, including grinding the pipe surface.



Technically perfect welded pipes are of the same quality as seamless pipes if the appropriate 100 % welding inspection has been performed

## Corrosion resistance

The pipes welded on the basis of the valid calculations (AD-data sheet 2000 / ANSI B 31.3 / ASME VIII) are of exactly the same quality as seamless pipes, providing a 100 % weld check has been performed. With the production of longitudinally welded pipes, carefully selected welding procedures are used, combined with the state-of-the-art testing technologies (e. g. digital X-ray inspection). In the process, the corrosion resistance in the weld area is kept constant by using higher alloyed welding additives, i. e. at least at the level of the base material. The assessment of the interior pressure calculation for seamless pipes is 100 %. This can also be ensured with welded pipes when combined with a complete weld check (welding factor  $v = 1.0$ ). As a result of this reliability of the

production process, the longitudinal seam in the welded pipes does not constitute a weak point. Circumferential welding with both seamless and longitudinally welded pipes must therefore be performed to a high-quality level and must take account of the specific parameters.

### Conclusion

The decision whether to use a seamless or welded pipe depends principally on the wall thickness / diameter ratio and the specified pipe tolerances. Normally the advantages of the welded pipe outweigh the alternative, and so at the moment in Western European industry it is mainly welded pipes which are used.



**Richard Brandes**  
Global Business Development Manager

A quality-enhanced surface condition can be achieved more cost-effectively with welded pipes