


MELT FILTER ELEMENT

High dirt-holding capacity (longer lifetime)



PRODUCT PARAMETERS

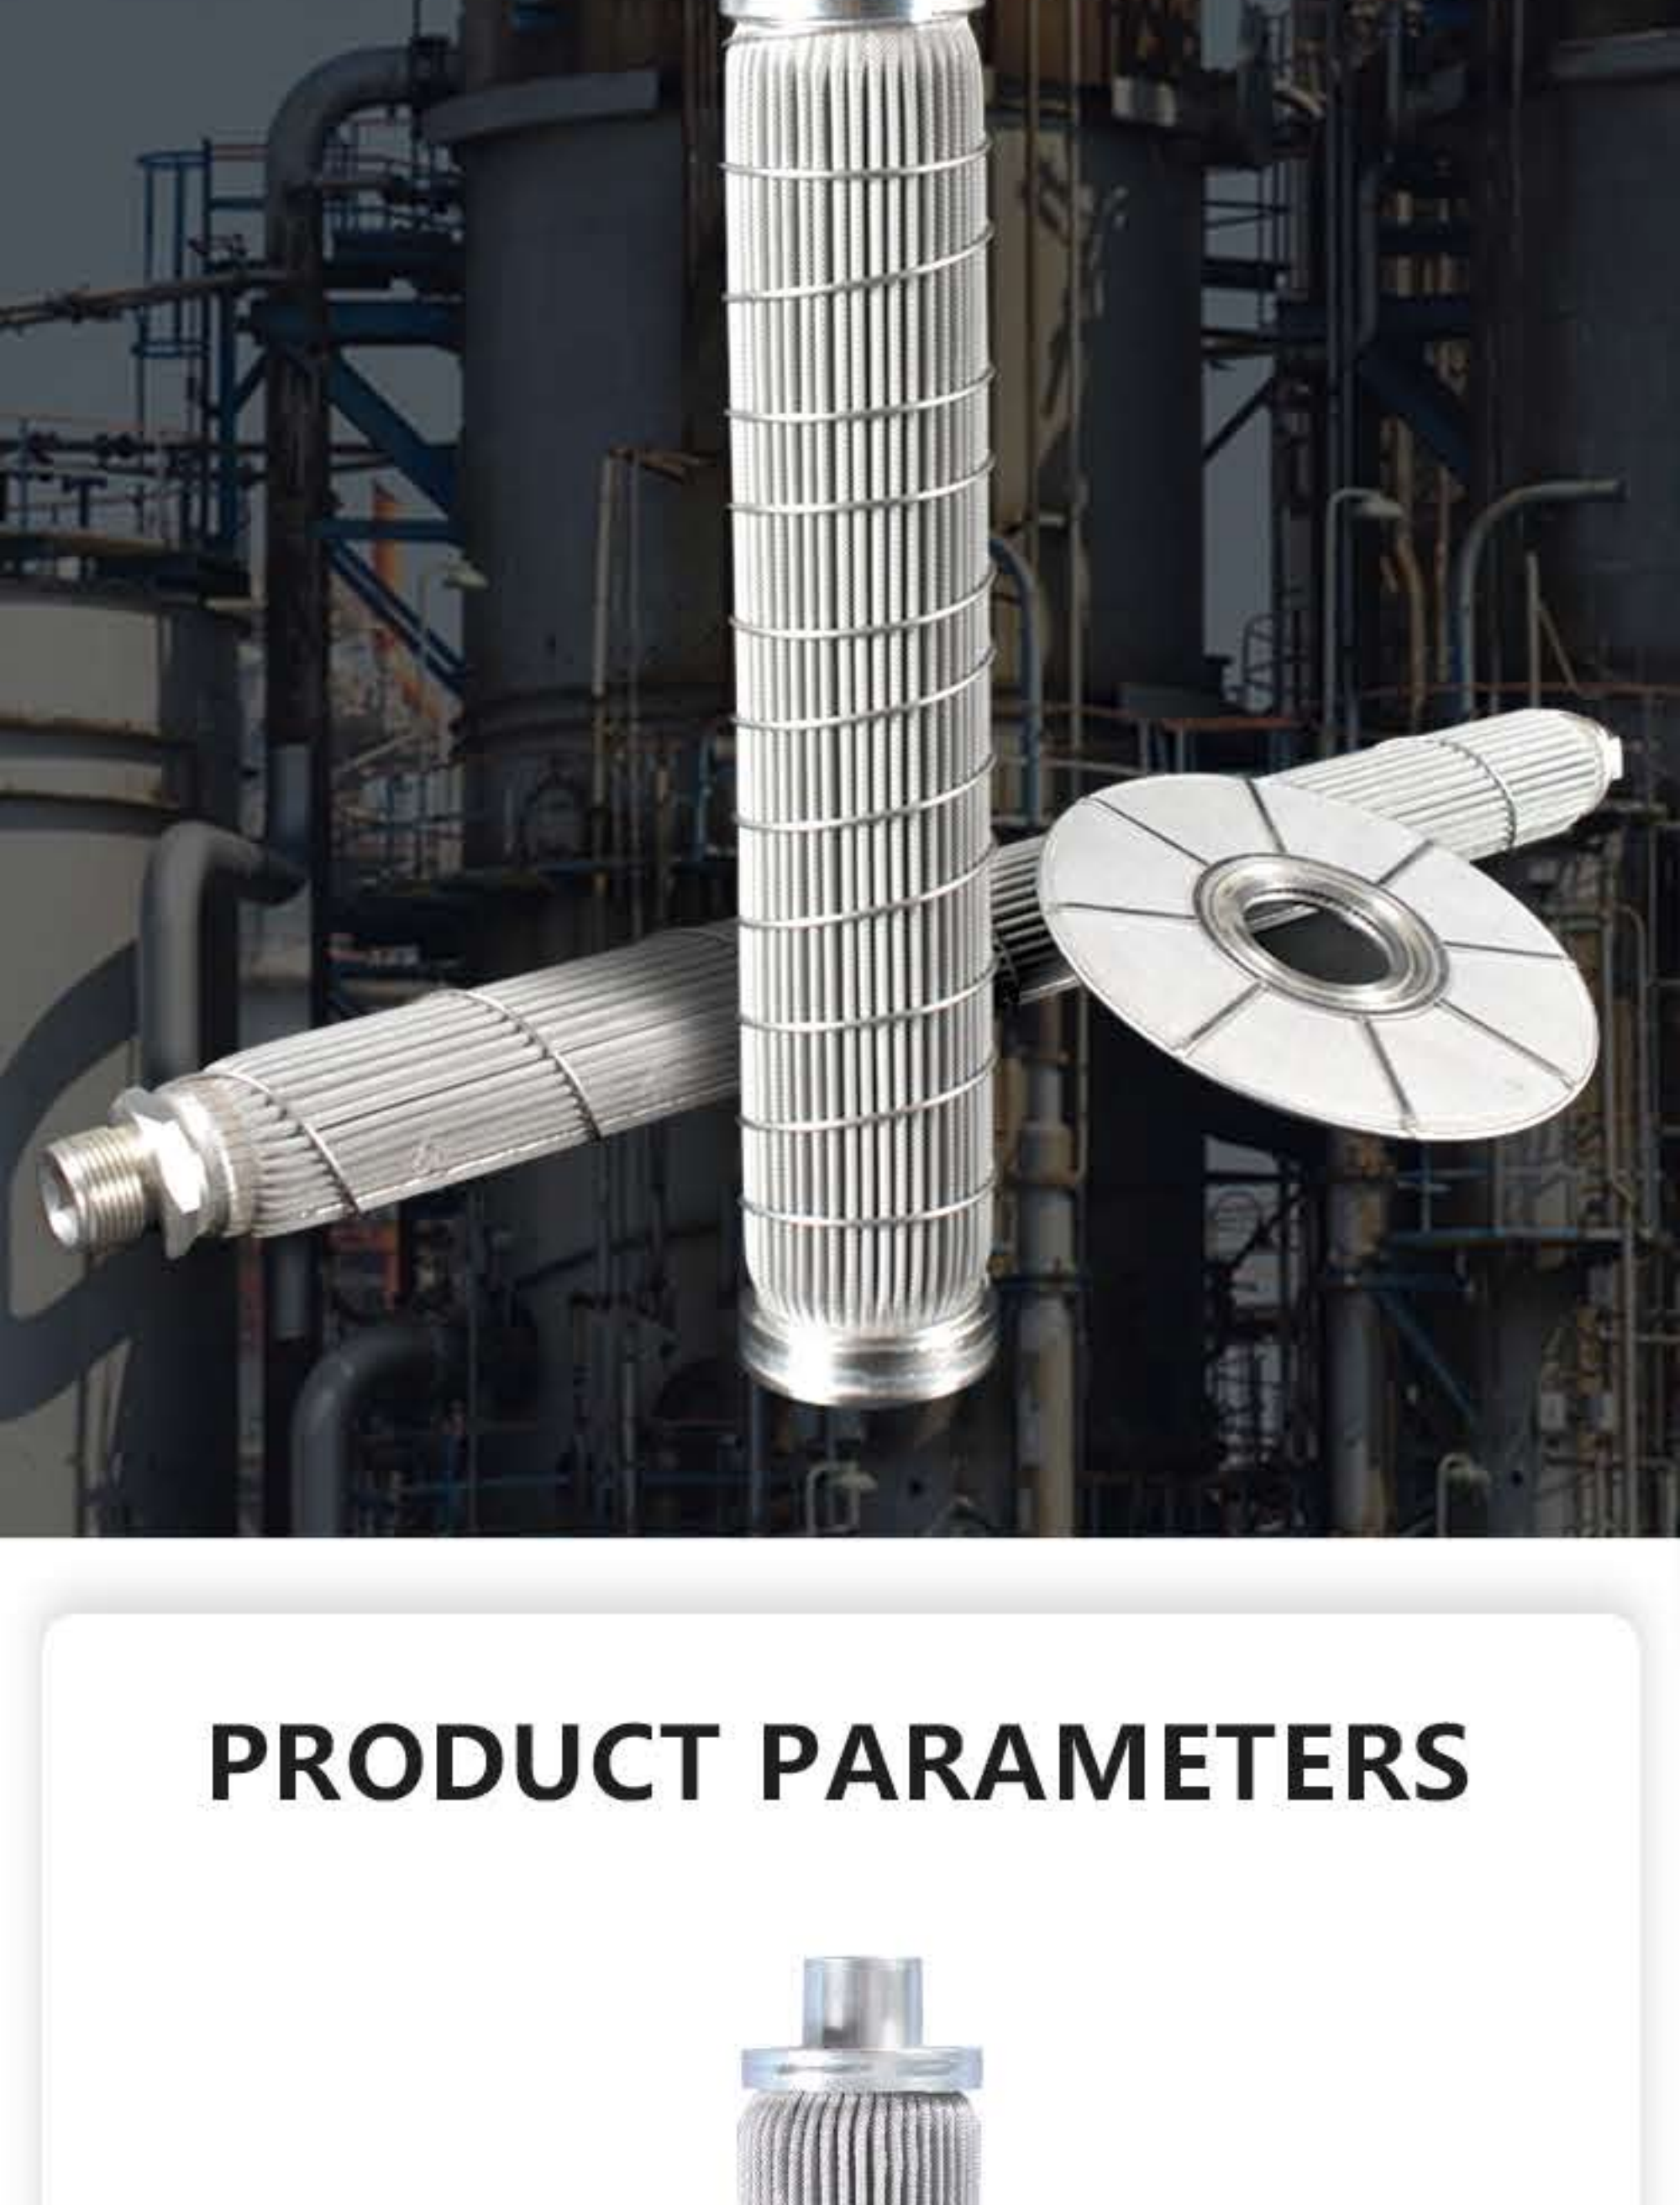

Product name: Melt Filter Element
Operating pressure(Max): P=30Mpa
Operating temperature(Max): T=300°c
Viscosity : 260pas
Dirt holding capacity: 16.9-41mg/cm²
Initial differential pressure(Max): P=10mpa



Polymer melt filter is manufactured by special technology using 100% stainless steel fibers. AS a new type of porous body material, it possesses not only superior functions of filtration, permeability, high specific surface area and capillary, but also the advantages such as excellent heat resistance, corrosion resistance and high strength. They are good spare parts for petroleum, chemical , chemical fiber ,polyester and film industries.

FILTER ENGINE CONTAMINANTS

Filter— We're more professional



TRUST IN THE DETAILS

- Stable pore shapes
- High permeability
- Low pressure drop
- High dirt-holding capacity (longer lifetime)
- High temperature resistance



PRODUCT PHOTOS

